



IT 16 Model SLIDING ARM SERIES




Key Features




Auto center body lock.




External hydraulic locking standard.



Standard with hook safety latch.



Automatic interlock system.



Various optional stabilisers.


Standard Features

- External locks
- Automatic centre body lock
- Standard hook safety lock
- Automatic bin clamp lockout when tipped
- Bolted hook

Optional Extras

- Internal hydraulic locking
- Front hydraulic locking
- Additional hydraulic circuit with cab control
- Suspension stabiliser
- Folding stabiliser
- Vertical stabiliser

IT 16 Model SLIDING ARM SERIES

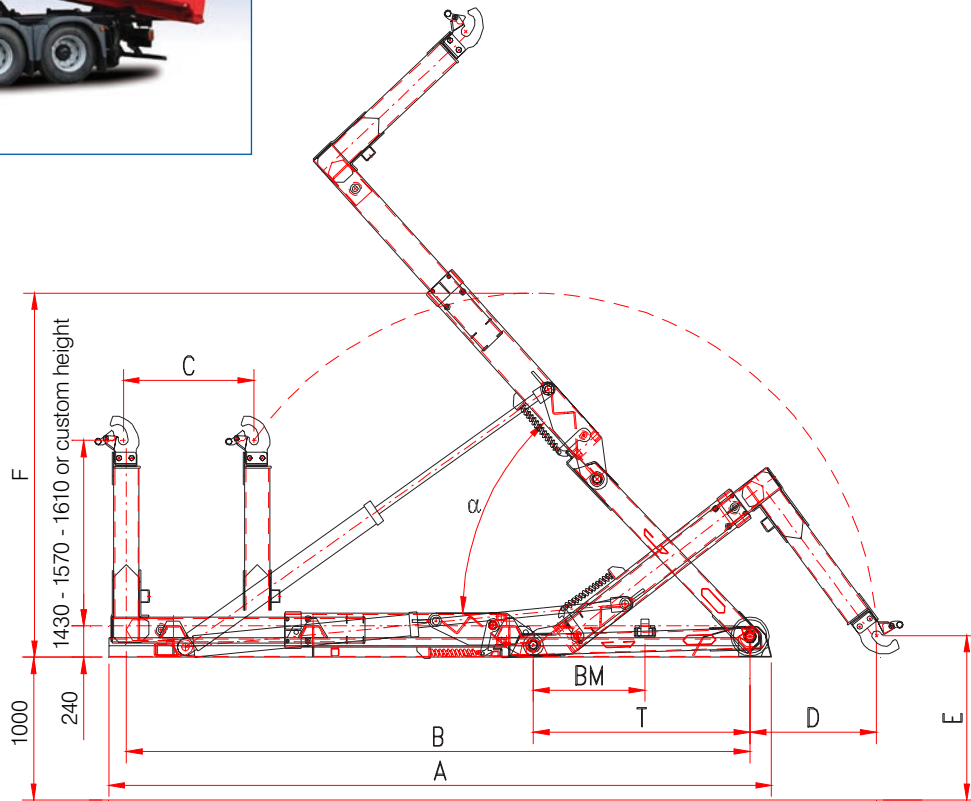

Models and Specifications

	A	B	C	D	E	F	T	BM	Weight	Tipping Angle
IT 16 C	4.135	3.850	800	1.400	1.145	2.600	1.110	720	1.580	58°
IT 16 NC	4.335	4.050	800	1.200	1.145	2.600	1.310	720	1.600	53°
IT 16 N	4.535	4.250	800	1.000	1.145	2.600	1.510	20	1.630	49°
IT 16 NL	4.735	4.450	800	800	1.145	2.600	1.710	720	1.650	45°

* Standard Model

THE VACLIFT COMMITMENT

- Quality product
- Outstanding value
- Professional service
- World class design and construction

Phone 03 9339 9999
 Fax 03 9338 9540
 Email info@icaust.com

39 Tullamarine Park Rd,
 Tullamarine, Victoria 3043
 website: www.icaust.com

Vaclift provides the information contained herein in good faith, based upon the right to change specifications without notice. However, Vaclift accepts no liability, either direct or indirect for any loss or consequential loss that may result from the application of this information. Purchasers must conduct their own enquiries to ensure that the products are suitable for their own particular purposes. Photographs may show equipment that is available at extra cost. Vaclift Pty Ltd. ABN 45 004 743 748 Printed 10/07 VAC 010