


BoB Hooklifts

Hooklift Technical Data Sheet



Internal Locks

External Locks





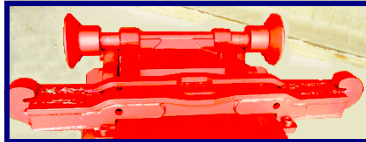


Model IT 20

- Lifting Capacity 20 tonnes.
- Working Pressure 310 Bar.
- Max tipping angle 55 deg.
- Rail width 1060mm.
- Internal or external hydraulic locking available.
- Automatic mechanical center body lock.
- Standard with hook lock.
- Standard with automatic bin clamp lockout when tipped.
- Optional axle lock or stabilisor

Type	Kg	A	B	C	D	E	F	T	L	TIP	MIN	MAX
IT20XC	2420	4750	4530	1000	1150	1245	2910	1310	260	55'	3530	5800
IT20C	2470	4950	4730	1000	1310	1245	2910	1310	260	53'	3730	6000
IT20NC	2520	5150	4930	1000	1110	1245	2910	1510	260	51'	3930	6200
IT20N	2570	5350	5130	1000	910	1245	2910	1710	260	49'	4130	6400
IT20NL	2620	5550	5330	1000	710	1245	2910	1910	260	47'	4330	6600
IT20L	2680	5750	5530	1000	510	1245	2910	2110	260	45'	4530	6800

Body Lock Hook Lock Clamp Lockout Roller

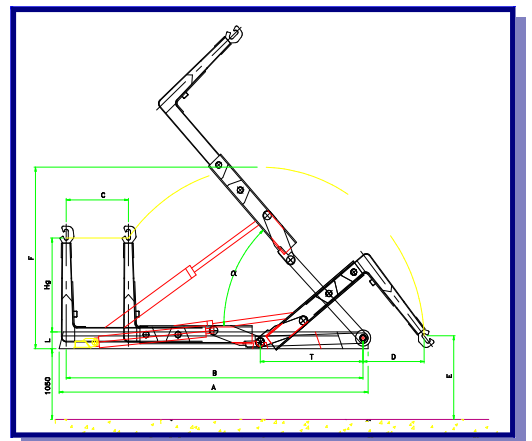

Max bin length is estimate, actual max length depends upon wheelbase, max overhang and overall length. Minimum bin lth may produce unacceptable load angle. Client must check suitability for intended purpose. The data on this pamphlet is indicative, all critical data should be confirmed prior to purchase. The manufacturer reserves the right to alter the specification and design of the machine without prior notice.

Vaclift
 39 Tullamarine Park Rd
 Tullamarine, Vic.
 Australia 3043
 A.C.N. 004 743 748
 A.B.N. 45 004 743 748

Phone: 61 3 9338 0744
 Fax: 61 3 9338 9540
 Email: sales@icaust.com
 www.icaust.com

